



## ASSEMBLY INSTRUCTIONS



TO assemble safety cables:

1. Join fixture safety cables with safety cable from ceiling.
2. Wrap both safety cable around the cable lock nut.
3. Insert screws into both holes on cable lock nut, secure screws with screwdriver.
4. Push the cable lock nut into outlet box.

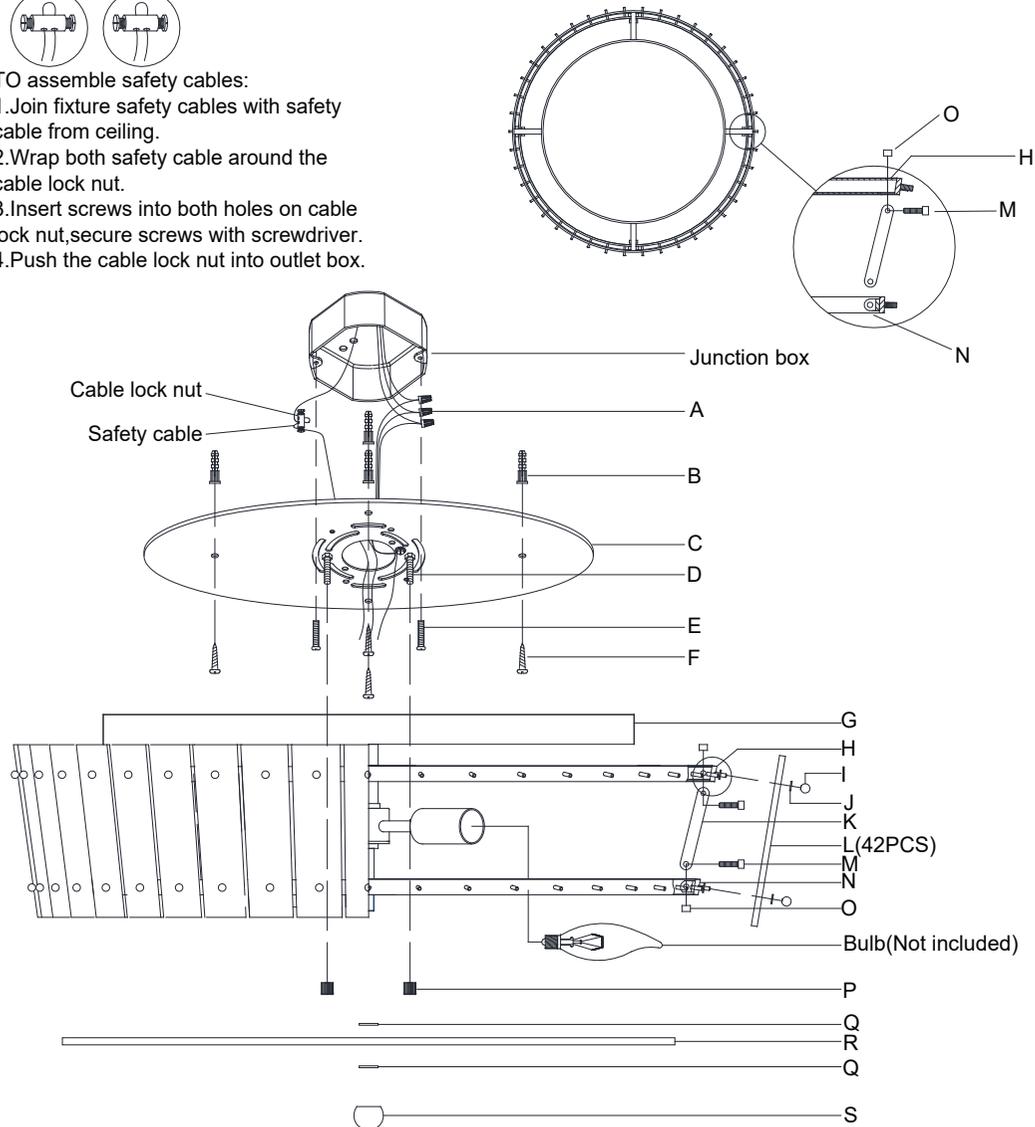

## Cadence Large Single-Tier Flush Mount

Item # S 4652

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**


**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**


1. Carefully remove all parts from the box.
2. Attach the metal bars (K) to the metal ring (H & N) and secure with the screws (M) and nuts (O).  
Please note that the nipple on both the metal ring (H & N) should be facing the same direction.
3. Remove the mounting plate (C) from the canopy (G) by unscrewing the knurled nuts (P).
4. Put the mounting plate (C) on the ceiling and mark the holes position with the pencil (not included).
5. Drill holes on the ceiling and knock the anchors (B) into the holes.
6. Install the mounting plate (C) to the junction box and secure with the mounting screws (E), then secure the wood screws (F) to the anchors (B) and lock tight.
7. Connect the safety cables as shown in diagram.
8. Wrap the fixture ground wire to the green ground screw on the mounting plate (C) and secure, then connect to the ground wire in the junction box using the wire nut (A).  
**IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.**
9. Connect the fixture white wire to the neutral wire in the junction box using the wire nut (A).
10. Connect the fixture black wire to the hot wire in the junction box using the wire nut (A).  
**DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
11. Install the canopy (G) to the mounting plate (C) and secure with the knurled nuts (P).
12. Attach the glass panels (L) to the fixture body and secure with the rubber washers (J) and ball nuts (I).  
**DO NOT OVER-TIGHTEN, OTHERWISE GLASS COULD BECOME DAMAGED.**

## ASSEMBLY INSTRUCTIONS



TO assemble safety cables:

1. Join fixture safety cables with safety cable from ceiling.
2. Wrap both safety cable around the cable lock nut.
3. Insert screws into both holes on cable lock nut, secure screws with screwdriver.
4. Push the cable lock nut into outlet box.

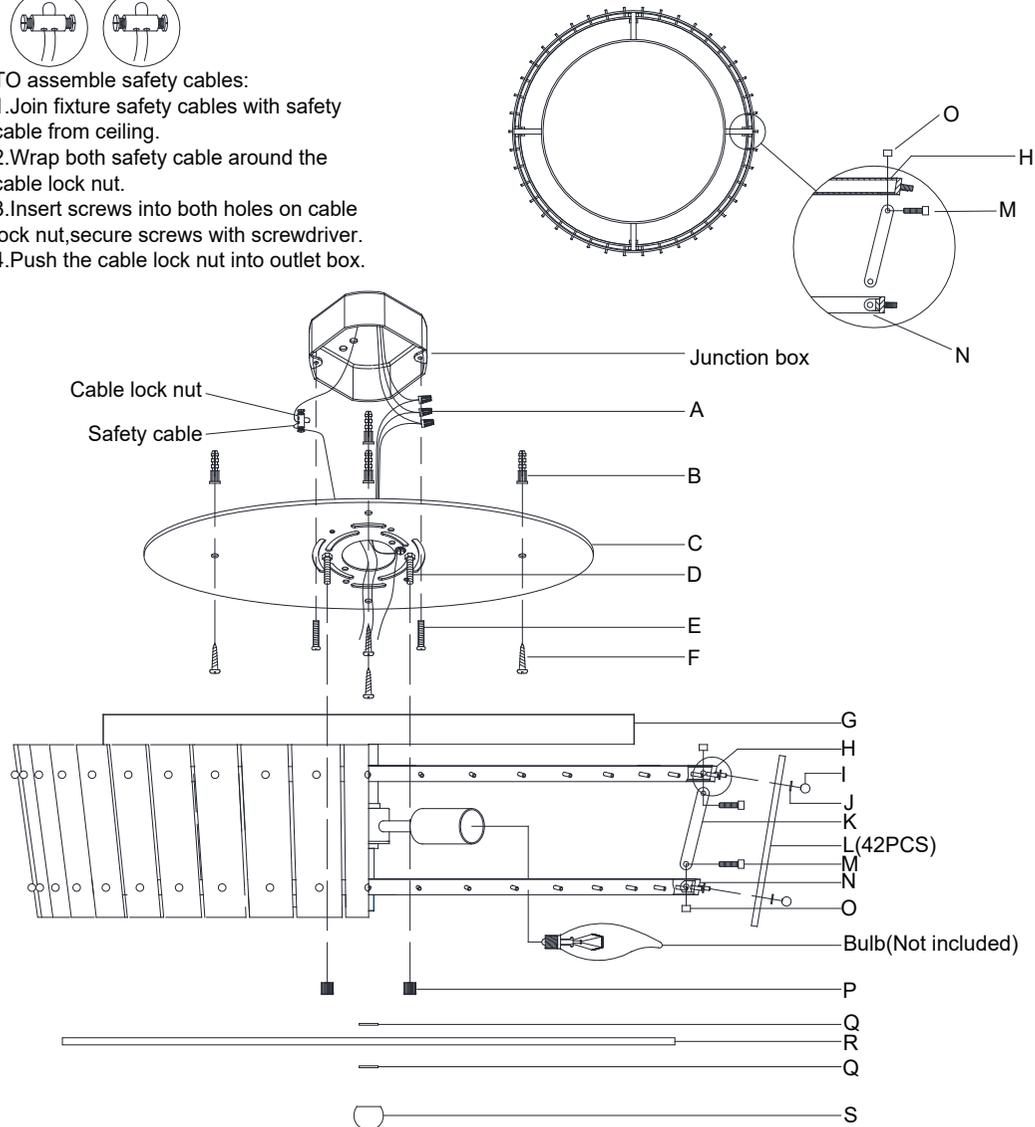

## Cadence Large Single-Tier Flush Mount

Item # S 4652

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

13. Insert bulbs (not included) into the sockets.
14. Attach the rubber washer (Q) to either side of the glass panels (R) and secure to the bottom of the fixture body with the finial (S).
15. Installation is complete, turn on power at fuse or circuit breaker.

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.